

H-SERIES

HYDRAULIC AUGER DRIVES

H-Series Hydraulic Auger Drives are purpose-built for pros who expect serious performance and durability because they are built with the best components available and will deliver years of top performance backed by the best warranty on the market.




LC-SERIES
M-SERIES
H-SERIES



Attachment options are available for all modern equipment.

IT'S ALL ABOUT THE TORQUE

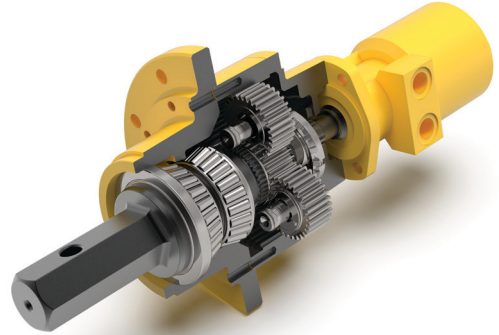


We build H-Series powertrains with first-class Parker hydraulic motors and Auburn Gear planetary drives to create an exceptional auger drive that delivers jaw-dropping torque, and that is built to last.

FIELD-SERVICABLE OUTPUT SHAFT



H-Series auger drives feature an interchangeable 2-inch hex output shaft (part# 113300-00) covered by our Belltec Lifetime Part Replacement Program. If this part ever bends or breaks, ship it to us for a free replacement.

THE RIGHT TOOL FOR THE JOB

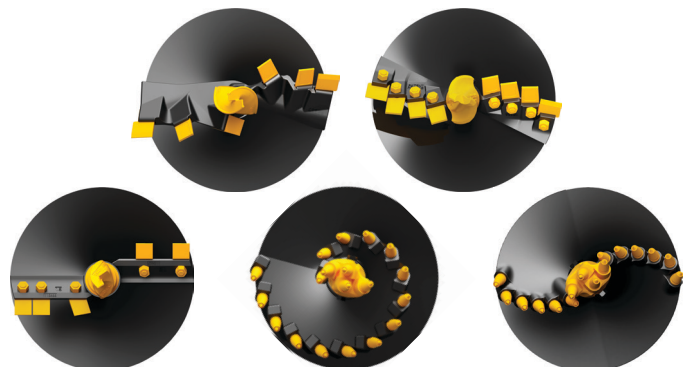

Belltec offers the most comprehensive lineup of performance augers on the market. Match an H-Series auger drive with the right Belltec auger, and you'll maximize the benefits of using a top-rated auger drive.

H-SERIES

HYDRAULIC AUGER DRIVES

H-Series Hydraulic Auger Drives are available in four models for auxiliary hydraulic systems that operate between 6 and 35 GPM and up to 3500 PSI. Contact a Belltec representative or visit your Belltec dealer to discuss which H-Series model will best suit your equipment.



WHICH ONE WORKS FOR YOU?

H-200 H-300 H-350

SPECIFICATIONS

ATTRIBUTE	H-200	H-300	H-350
Min./Max. Fluid Flow Limits	10 GPM - 20 GPM	15 GPM - 30 GPM	20 GPM - 35 GPM
Max. Continuous Pressure	3000 PSI	3000 PSI	3000 PSI
Max. Intermittent Pressure	3500 PSI	3500 PSI	3500 PSI
Max. Auger Dia. Dirt/Rock	30 in/24 in	36 in/36 in	36 in/36 in

SPEED OUTPUT*

FLOW	H-200	H-300	H-350
10 GPM	43 RPM	—	—
15 GPM	65 RPM	45 RPM	—
20 GPM	86 RPM	60 RPM	50 RPM
25 GPM	—	75 RPM	62 RPM
30 GPM	—	90 RPM	75 RPM
35 GPM	—	—	87 RPM

TORQUE OUTPUT*

PRESSURE	H-200	H-300	H-350
2000 PSI	1420 ft. lbs.	2041 ft. lbs.	2459 ft. lbs.
2500 PSI	1776 ft. lbs.	2550 ft. lbs.	3075 ft. lbs.
3000 PSI	2131 ft. lbs.	3062 ft. lbs.	3688 ft. lbs.
3500 PSI	2486 ft. lbs.	3572 ft. lbs.	4303 ft. lbs.

*All values are theoretical. Actual performance may vary.



BEST WARRANTY ON THE MARKET

We offer the leading warranties in the industry, not just to give our customers peace of mind, but as a testament to our workmanship. We count on the hardworking people who use our products to grow our food, construct our buildings, maintain our infrastructure, and fill other essential roles. They deserve the best tools for the job backed by our commitment to exceptional service.



inquiry@belltec.net • 1-800-242-9410 • www.belltec.net